



JS700 | Côtes de Sertissage

Crimping diameters

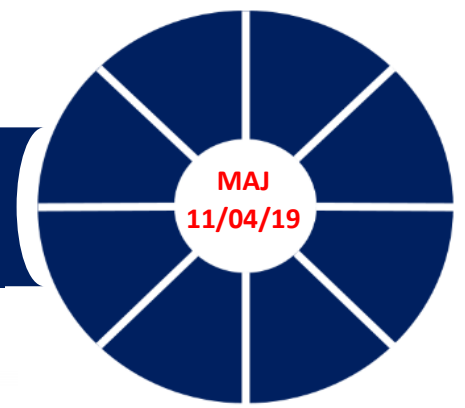

Côtes de sertissages téléchargeables sur : www.bjflex.com

TOLERANCE SERTISSAGE : 0 / - 0.3

BEZEK

Diamètre Tuyau	JUPES Ø X long	Paramètres Sertissage	TUYAU / HOSES	
			R17	R1T
DN02 1/8 MOD2	JS702	Lg Dénudage Ø serti		Sans 13.5
DN05 3/16 MOD3	JS704 Ø 23x27	Lg Dénudage Ø serti		Sans 14.5
DN06 1/4 MOD4	JS706 Ø 24X27	Lg Dénudage Ø serti	Sans 14.9	Sans 15.3
DN08 5/16 MOD5	JS708 Ø 26X32	Lg Dénudage Ø serti	Sans 16.8	Sans 17.3
DN10 3/8 MOD6	JS710 Ø 30X33.5	Lg Dénudage Ø serti	Sans 18.6	Sans 19.7
DN13 1/2 MOD8	JS713 Ø 34X37.3	Lg Dénudage Ø serti	Sans 22.3	Sans 23

Attention : les valeurs sont données à titre indicatif, contrôle à la pige de la déformation du nippie

www.bjflex.com